


Pureair Filter Co.

DM/HIROSS SERIES

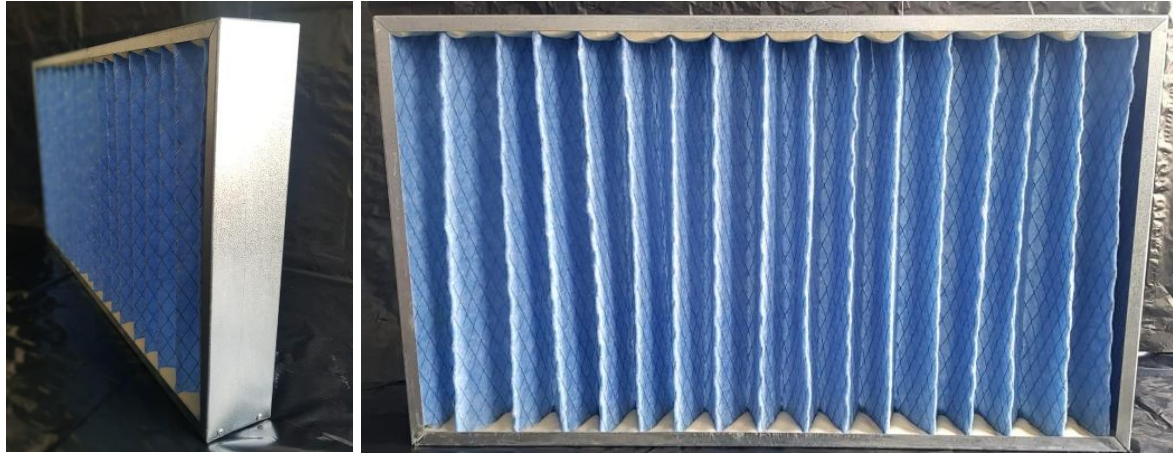

Application

DM/HIROSS filters are designed for use in all Airconditioning and Ventilation applications, alone or as a pre-filter where high levels of filtration are required and are ideally suited for installation where washing is not possible.

Construction

These disposable filters are manufactured in South Africa Aluminium mesh supported fine filament non woven Polyester air filter media sealed into a 0.6mm Galvanized steel frame.

Unit2, Gamib Park, 41 Stella Road, Montague Gardens, 7441

(021) 551 6060



janet@pureaire.biz/sales@pureaire.biz

Pureair Filter Co.

Filter Specification

<i>Rated Face Velocity</i>	<i>2.5m/sec</i>
<i>Arrestance</i>	<i>Eurovent Class EU 3 Merv 6</i>
<i>Initial Pressure Drop</i>	<i>60Pa</i>
<i>Final Pressure Drop</i>	<i>250Pa</i>
<i>Pleats per metre</i>	<i>Standard 40. Hi-Capacity 60.</i>
<i>Frame</i>	<i>0.6mm Galvanized steel</i>
<i>Media</i>	<i>100% Polyester. PT 75-D</i>
<i>Media Support</i>	<i>Aluminium Expanded Mesh</i>

Sizes Available

Size (HxWxD)	Flow (m/sec)
595 x 595 x 48	0.94 m/sec
495 x 620 x 48	0.82 m/sec
495 x 495 x 48	0.66 m/sec
395 x 620 x 48	0.66 m/sec
295 x 595x 48	0.47 m/sec
<i>Custom sizes to suit your application</i>	

Unit2, Gamib Park, 41 Stella Road, Montague Gardens, 7441

(021) 551 6060



janet@pureaire.biz/sales@pureaire.biz

Pureair Filter Company t/a Fibatron